

Part Number:: PL-PTyyzzxx


FEATURES:ATURES:

SC Fiber Optic Pigtail :

- Compliant to IEC, TIA/EIA, NTT and JIS standard.
- Enhanced strain relief, zip cord and round cable.
- All cables are riser-rated (OFNR).
- Environmental stable.

APPLICATIONS::

- Telecommunications
- LAN
- FTTH
- Optic fiber sensors
- Testing instruments

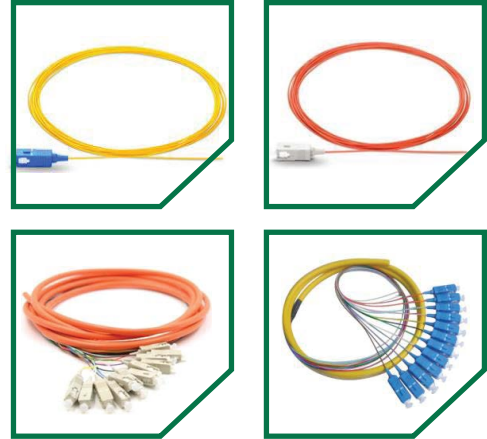

Specifications:

Parameter	Single-mode UPC/PC	Single-mode APC	Multi-mode
Insertion Loss	≤0.2dB	≤0.3dB	≤0.2dB
Return Loss	≥35dB	≥60dB	≥30dB
Durability	≥ 1000 times		
Cable Diameter	0.9mm		
Fiber Type	G652D		
Interchangeability	≤0.2dB		
Vibration	≤0.2dB		
Operating Temperature	-40 C to +75 C		
Storage Temperature	-45 C to +85 C		

Order Information

Fiber Type	Single-mode (SM) or Multi-mode (MM)
Cable Length	1.5m or others
Polishing	UPC (or PC) or APC
Color	Blue (SM UPC) / Green (SM APC) / Grey (MM UPC) / Aqua (OM3 UPC) / Magenta (OM4 UPC)

Part Number:: PL-PTyyzzxx

Part Number:

Part Number	Description
PL-PS2SCU15	SC/UPC Single Mode 0.9mm Pigtail, 1.5 meter
PL-PS2SC12B15	SC/UPC Single Mode 12 Fibers Bundle Pigtail
PL-PS2SCA15	SC/ APC Single Mode 0.9mm Pigtail, 1.5 meter
PL-PS2SC12BA15	SC/ APC Single Mode 12 Fibers Bundle Pigtail
PL-PM2SCU15	SC/UPC Multi Mode OM2 0.9mm Pigtail, 1.5 meter
PL-PM2SC12B15	SC/UPC Multi Mode OM2 12 Fibers Bundle Pigtail
PL-PM3SCU15	SC/UPC Multi Mode OM3 0.9mm Pigtail, 1.5 meter
PL-PM3SC12B15	SC/UPC Multi Mode OM3 12 Fibers Bundle Pigtail
PL-PM4SCU15	SC/UPC Multi Mode OM4 0.9mm Pigtail, 1.5 meter
PL-PM4SC12B15	SC/UPC Multi Mode OM4 12 Fibers Bundle Pigtail

