

Part Number:: PL-PTyyzzxx


FEATURES:

LC Fiber Optic Pigtail :

- Compliant to IEC, TIA/EIA, NTT and JIS standard.
- Enhanced strain relief, zip cord and round cable.
- All cables are riser-rated (OFNR).
- Environmental stable.

APPLICATIONS::

- Telecommunications
- LAN
- FTTH
- Optic fiber sensors
- Testing instruments

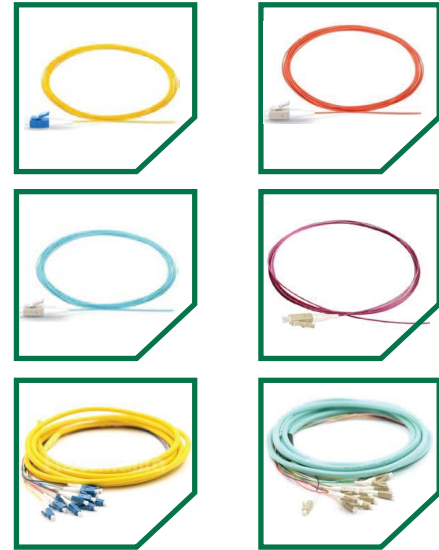

Specifications:

Parameter	Single-mode UPC/PC	Single-mode APC	Multi-mode
Insertion Loss	≤ 0.2dB	≤ 0.3dB	≤ 0.2dB
Return Loss	≥ 35dB	≥ 60dB	≥ 30dB
Durability	≥ 1000 times		
Cable Diameter	0.9mm		
Fiber Type	G652D		
Interchangeability	≤ 0.2dB		
Vibration	≤ 0.2dB		
Operating Temperature	-40°C to +75°C		
Storage Temperature	-45°C to +85°C		

Order Information

Fiber Type	Single-mode (SM) or Multi-mode (MM)
Cable Length	1.5m or others
Polishing	UPC (or PC) or APC
Color	Blue (SM UPC) / Green (SM APC) / Grey (MM UPC) / Aqua (OM3 UPC) / Magenta (OM4 UPC)

Part Number:: PL-PTyyzzxx

Part Number:

Part Number	Description
PL-PS2LCU15	LC/UPC Single Mode 0.9mm Pigtail, 1.5 meter
PL-PS2LC12B15	LC/UPC Single Mode 12 Fibers Bundle Pigtail
PL-PS2LCA15	LC/ APC Single Mode 0.9mm Pigtail, 1.5 meter
PL-PS2LC12BA15	LC/ APC Single Mode 12 Fibers Bundle Pigtail
PL-PM2LCU15	LC/UPC Multi Mode OM2 0.9mm Pigtail, 1.5 meter
PL-PM2LC12B15	LC/UPC Multi Mode OM2 12 Fibers Bundle Pigtail
PL-PM3LCU15	LC/UPC Multi Mode OM3 0.9mm Pigtail, 1.5 meter
PL-PM3LC12B15	LC/UPC Multi Mode OM3 12 Fibers Bundle Pigtail
PL-PM4LCU15	LC/UPC Multi Mode OM4 0.9mm Pigtail, 1.5 meter
PL-PM4LC12B15	LC/UPC Multi Mode OM4 12 Fibers Bundle Pigtail

