


Part Number: PL-WOxUzzyy

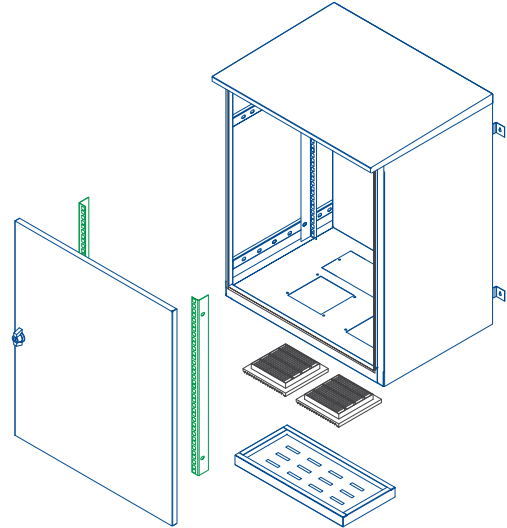

**FEATURES:**

- Conforms to DIN 41494 or Equivalent EIA /ISO/ EN/ CEA Standard Adjustable mounting depth
- 2 No Adjustable, 19" verticals with Punched 10 mm Square Hole and Universal 12.7 mm -15.875mm-15.875 mm alternating hole pattern offers greater mounting flexibility, maximizes usable mounting space
- State-of-the-art manufacturing methods provide the best product quality and fastest delivery in the industry  
100% assured compatibility with all equipments conforming to DIN 41494 (General industrial standard for equipments).
- Special Dual Coat Powder coated finish with seven-tank pretreatment process meeting ASTM standard to Meet Harsh Out door Requirement.
- Grounding & Bonding options

**Physical Characteristics (Overall):**

Technical Data:

Basic Frame	Steel
Construction	Welded
Top & Bottom Cover	Welded to frame with cable entry exit cut outs in Bottom.
Front Door	Lockable Metal Plain Door
19" Mounting Angle	Formed Steel
Std. Equipment Mounting	DIN Std. 10mm Sq. Slots
Standard Finish	Special Dual Coat Powder coated
Standard Colour	Grey & Off White OR Black
Rack Standard	Conforms to DIN 41494 or equivalent standard
Static Load	30 Kg (Uniformly distributed in U Space) / 2KG Per U

Part Number: PL-WOxUzzyy

**Dimensions:**

Capacity	H	h	W	w	D	d
6U/600X600	347	6U	600	19"	600	580
9U/600X600	481	9U	600	19"	600	580
12U/600X600	613	12U	600	19"	600	580
15U/600X600	749	15U	600	19"	600	580

**Part Number:**

Part Number	Description
PL-WO4U6060	Wall Mount Cabinet 6U (W600 x D600)mm
PL-WO6U6060	Wall Mount Cabinet 9U (W600 x D600)mm
PL-WO9U6060	Wall Mount Cabinet 12U (W600 x D600)mm
PL-WO12U6060	Wall Mount Cabinet 15U (W600 x D600)mm

